

## Lab 9: Keyboard (Calculator and Caps Lock Control)

### Objective


- ✓ Implement the keyboard function

### Prerequisite

- ✓ Fundamentals of logic gates.
- ✓ Logic modeling in Verilog HDL.
- ✓ Keyboard control procedure

### Experiments

- Implement key board using the left-hand-side keyboard (inside the black blocks).
  - Press 0/1/2/3/4/5/6/7/8/9 and show them in the seven-segment display. When a new number is pressed, the previous number is refreshed and overwritten.
  - Press a/s/m (addition/subtraction/multiplication) and show them in the seven-segment display as your own defined A/S/M pattern. When you press "Enter", refresh (turn off) the seven-segment display.
- Implement a single digit decimal adder using the left-hand-side keyboard (inside the black blocks). Use the key board as the input and display the results on the 7-segment display (The first two digits are the addend/augend, and the last two digits are the sum).
- Implement a two-digit decimal adder/subtractor/multiplier using the right-hand-side keyboard (inside the red block). You don't need to show all inputs and outputs at the same time in the 7-segment display. You just need to show inputs when they are pressed and show the results after "Enter" is pressed.

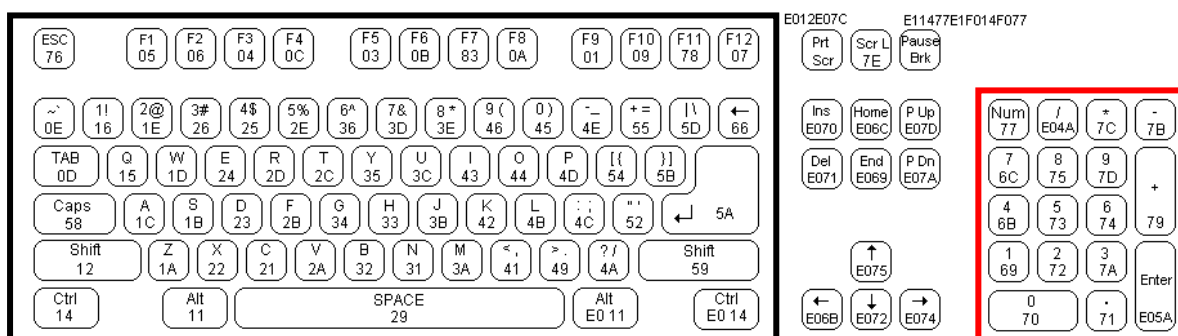

4. Implement the “Caps” control in the keyboard. When you press A-Z and a-z in the keyboard, the ASCII code of the pressed key (letter) is shown on 7-bit LEDs.

4.1 Press “Caps Lock” key to change the status of capital/lower case on the keyboard. Use a led to indicate the status of capital/lowercase in the keyboard and show the ASCII code of the pressed key on 7-bit LEDs.

4.2 Implement the combinational keys. When you press “Shift” and the letter keys at the same time, 7-bit LEDs will show the ASCII code of the uppercase/lowercase of the pressed letter when the “Caps Lock” is at the lowercase/uppercase status.

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	<b>NUL</b> (null)	32	20	040	&#32;	<b>Space</b>	64	40	100	&#64;	<b>@</b>	96	60	140	&#96;	<b>`</b>
1	1	001	<b>SOH</b> (start of heading)	33	21	041	&#33;	<b>!</b>	65	41	101	&#65;	<b>A</b>	97	61	141	&#97;	<b>a</b>
2	2	002	<b>STX</b> (start of text)	34	22	042	&#34;	<b>"</b>	66	42	102	&#66;	<b>B</b>	98	62	142	&#98;	<b>b</b>
3	3	003	<b>ETX</b> (end of text)	35	23	043	&#35;	<b>#</b>	67	43	103	&#67;	<b>C</b>	99	63	143	&#99;	<b>c</b>
4	4	004	<b>EOT</b> (end of transmission)	36	24	044	&#36;	<b>\$</b>	68	44	104	&#68;	<b>D</b>	100	64	144	&#100;	<b>d</b>
5	5	005	<b>ENQ</b> (enquiry)	37	25	045	&#37;	<b>%</b>	69	45	105	&#69;	<b>E</b>	101	65	145	&#101;	<b>e</b>
6	6	006	<b>ACK</b> (acknowledge)	38	26	046	&#38;	<b>&amp;</b>	70	46	106	&#70;	<b>F</b>	102	66	146	&#102;	<b>f</b>
7	7	007	<b>BEL</b> (bell)	39	27	047	&#39;	<b>'</b>	71	47	107	&#71;	<b>G</b>	103	67	147	&#103;	<b>g</b>
8	8	010	<b>BS</b> (backspace)	40	28	050	&#40;	<b>(</b>	72	48	110	&#72;	<b>H</b>	104	68	150	&#104;	<b>h</b>
9	9	011	<b>TAB</b> (horizontal tab)	41	29	051	&#41;	<b>)</b>	73	49	111	&#73;	<b>I</b>	105	69	151	&#105;	<b>i</b>
10	A	012	<b>LF</b> (NL line feed, new line)	42	2A	052	&#42;	<b>*</b>	74	4A	112	&#74;	<b>J</b>	106	6A	152	&#106;	<b>j</b>
11	B	013	<b>VT</b> (vertical tab)	43	2B	053	&#43;	<b>+</b>	75	4B	113	&#75;	<b>K</b>	107	6B	153	&#107;	<b>k</b>
12	C	014	<b>FF</b> (NP form feed, new page)	44	2C	054	&#44;	<b>,</b>	76	4C	114	&#76;	<b>L</b>	108	6C	154	&#108;	<b>l</b>
13	D	015	<b>CR</b> (carriage return)	45	2D	055	&#45;	<b>-</b>	77	4D	115	&#77;	<b>M</b>	109	6D	155	&#109;	<b>m</b>
14	E	016	<b>SO</b> (shift out)	46	2E	056	&#46;	<b>.</b>	78	4E	116	&#78;	<b>N</b>	110	6E	156	&#110;	<b>n</b>
15	F	017	<b>SI</b> (shift in)	47	2F	057	&#47;	<b>/</b>	79	4F	117	&#79;	<b>O</b>	111	6F	157	&#111;	<b>o</b>
16	10	020	<b>DLE</b> (data link escape)	48	30	060	&#48;	<b>0</b>	80	50	120	&#80;	<b>P</b>	112	70	160	&#112;	<b>p</b>
17	11	021	<b>DC1</b> (device control 1)	49	31	061	&#49;	<b>1</b>	81	51	121	&#81;	<b>Q</b>	113	71	161	&#113;	<b>q</b>
18	12	022	<b>DC2</b> (device control 2)	50	32	062	&#50;	<b>2</b>	82	52	122	&#82;	<b>R</b>	114	72	162	&#114;	<b>r</b>
19	13	023	<b>DC3</b> (device control 3)	51	33	063	&#51;	<b>3</b>	83	53	123	&#83;	<b>S</b>	115	73	163	&#115;	<b>s</b>
20	14	024	<b>DC4</b> (device control 4)	52	34	064	&#52;	<b>4</b>	84	54	124	&#84;	<b>T</b>	116	74	164	&#116;	<b>t</b>
21	15	025	<b>NAK</b> (negative acknowledge)	53	35	065	&#53;	<b>5</b>	85	55	125	&#85;	<b>U</b>	117	75	165	&#117;	<b>u</b>
22	16	026	<b>SYN</b> (synchronous idle)	54	36	066	&#54;	<b>6</b>	86	56	126	&#86;	<b>V</b>	118	76	166	&#118;	<b>v</b>
23	17	027	<b>ETB</b> (end of trans. block)	55	37	067	&#55;	<b>7</b>	87	57	127	&#87;	<b>W</b>	119	77	167	&#119;	<b>w</b>
24	18	030	<b>CAN</b> (cancel)	56	38	070	&#56;	<b>8</b>	88	58	130	&#88;	<b>X</b>	120	78	170	&#120;	<b>x</b>
25	19	031	<b>EM</b> (end of medium)	57	39	071	&#57;	<b>9</b>	89	59	131	&#89;	<b>Y</b>	121	79	171	&#121;	<b>y</b>
26	1A	032	<b>SUB</b> (substitute)	58	3A	072	&#58;	<b>:</b>	90	5A	132	&#90;	<b>Z</b>	122	7A	172	&#122;	<b>z</b>
27	1B	033	<b>ESC</b> (escape)	59	3B	073	&#59;	<b>;</b>	91	5B	133	&#91;	<b>[</b>	123	7B	173	&#123;	<b>{</b>
28	1C	034	<b>FS</b> (file separator)	60	3C	074	&#60;	<b>&lt;</b>	92	5C	134	&#92;	<b>\</b>	124	7C	174	&#124;	<b> </b>
29	1D	035	<b>GS</b> (group separator)	61	3D	075	&#61;	<b>=</b>	93	5D	135	&#93;	<b>]</b>	125	7D	175	&#125;	<b>}</b>
30	1E	036	<b>RS</b> (record separator)	62	3E	076	&#62;	<b>&gt;</b>	94	5E	136	&#94;	<b>^</b>	126	7E	176	&#126;	<b>~</b>
31	1F	037	<b>US</b> (unit separator)	63	3F	077	&#63;	<b>?</b>	95	5F	137	&#95;	<b>_</b>	127	7F	177	&#127;	<b>DEL</b>

Source: [www.LookupTables.com](http://www.LookupTables.com)

TA: \_\_\_\_\_